

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :

A61M 1/10, H02K 7/09, F04D 29/04

A1

(11) International Publication Number:

WO 00/32257

(43) International Publication Date:

8 June 2000 (08.06.00)

(21) International Application Number: PCT/US99/26839

(22) International Filing Date: 10 November 1999 (10.11.99)

(30) Priority Data:

09/204,795

3 December 1998 (03.12.98)

US

(71) Applicant (for all designated States except US): KRITON MEDICAL, INC. [US/US]; 6790 Florin-Perkins Road, Sacramento, CA 95828-1812 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WAMPLER, Richard, K. [US/US]; 7827 Prospect Court, Granite Bay, CA 95746 (US). LANCISI, David, M. [US/US]; 184 Bittercreek Drive, Folsom, CA 95630 (US).


(74) Agent: GERSTMAN, George, H.; Gerstman, Ellis & McMillin, Ltd., Suite 2010, 2 N. LaSalle Street, Chicago, IL 60602 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: ACTIVE MAGNETIC BEARING SYSTEM FOR BLOOD PUMP

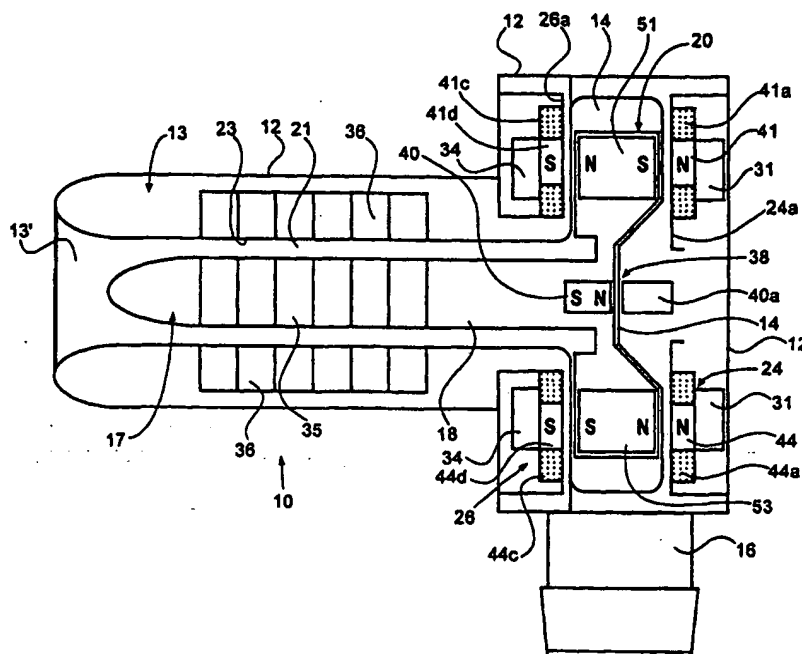

(57) Abstract

An implantable rotary blood pump including a rotor mounted for rotation within a pump housing. The rotor has a shaft portion and an impeller carried by the shaft portion. A rotor motor is provided, with the motor including a plurality of permanent magnets carried by the impeller and motor stators on opposite sides of the impeller. The motor is operable to transmit torque and also to provide an axial magnetic force that acts as an axial bearing.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ACTIVE MAGNETIC BEARING SYSTEM FOR BLOOD PUMP

FIELD OF THE INVENTION

The present invention concerns blood pumps. More specifically, the
5 invention pertains to continuous flow pumps of rotary design, which may be
suitable for installation in humans, for use as chronic ventricular assist devices.

BACKGROUND OF THE INVENTION

In Wampler U.S. Patent No. 5,695,471, a continuous flow pump of
rotary design is disclosed, suitable for permanent implantation in humans, for use
10 as a chronic ventricular assist device. The disclosed device uses passive, magnetic
radial bearings to maintain an impeller and its support shaft for rotation about an
axis, thus eliminating the necessity for a drive shaft seal.

Typically prior art blood pumps use mechanical bearings to support
the rotor with respect to the stator. The use of hydrodynamic thrust bearings has
15 been disclosed for aiding in preventing thrombosis. However, blood cell damage
and various other problems may be created by the use of hydrodynamic thrust
bearings and mechanical bearings and it is desirable for a blood pump to use a
magnetically suspended rotor if possible. However, a problem associated with
magnetically suspending the rotor is that movement of the pump may result in
20 movement of the rotor in the axial direction, causing the rotor or the impeller to
contact a part of the pump casing. It is highly undesirable in a blood pump

construction to have any continuing contact between the impeller and a part of the blood pump casing.

In Wampler U.S. Patent No. 5,695,471, there is disclosed the shuttling back and forth of the rotor assembly with each cardiac cycle of the user,
5 in order to prevent thrombosis. If this axial shuttling would not happen naturally, it would be desirable to have a system in which it could be induced electromagnetically.

In Wampler U.S. Application Serial No. 08/910,375, filed August 13, 1997, now Patent No. _____, the use of hydrodynamic bearings
10 in an implantable blood pump is disclosed. With the hydrodynamic bearings, there is a frictional engagement which has to be overcome before the hydrodynamic bearings can be fully effective. The frictional engagement is a result of a preload that is applied by the front loading of the magnetic bearing. Thus an initial starting force is required that will enable the initial frictional engagement to be overcome.
15 This initial starting force can create difficulties, and it would be advantageous to avoid its necessity.

Due to the preload of the negative axial spring rate of the passive radial magnetic bearings of the rotor, there is an axial magnetic force urging the impeller rearward against the casing. In view of the foregoing, it would be
20 advantageous to be able to manipulate the axial force on the impeller during the starting of the pump.

There have been attempts to alleviate the starting axial force problem by having suspended systems using electromagnets. Typically in such systems, a dedicated electromagnetic control system is used to control the position of the impeller. There would be separate dedicated electronic controls and
5 electromagnets for controlling the position of the rotor and the impeller. However, these separate dedicated electronic controls and electromagnets add to the weight, volume and complexity of the system.

It is, therefore, an object of the present invention to provide a rotary blood pump in which the rotor is magnetically suspended.

10 Another object of the present invention is to provide a rotary blood pump in which contact between the impeller and the blood pump housing is avoided.

A still further object of the present invention is to provide a novel rotary blood pump in which the axial forces on the impeller may be controlled.

15 An additional object of the present invention is to provide a novel rotary blood pump in which the axial position of the impeller may be controlled in an efficient manner.

Another object of the present invention is to provide a novel rotary blood pump that is small, light, simple in construction, and relatively easy to
20 manufacture.

Other objects and advantages of the present invention will become apparent as the description proceeds.

SUMMARY OF THE INVENTION

5 In accordance with the present invention, a rotary blood pump is provided. The pump comprises a pump housing and a rotor mounted for rotation within the housing. The rotor has a shaft portion and an impeller carried by the shaft portion. A rotor motor is provided. The motor includes a plurality of permanent magnets carried by the impeller and a motor stator including electrically
10 conductive coils and pole pieces located within the housing. The motor is operable to transmit torque and also to provide an axial magnetic force that acts as an axial bearing.

In the illustrative embodiment, the rotary blood pump includes passive radial magnetic bearings carried by the shaft portion and radial magnetic
15 bearings carried by the housing. A sensor is provided for detecting axial deflection of the impeller and a circuit is provided for energizing the stator in response to the detector.

In the illustrative embodiment, there is a first motor stator positioned on one side of the impeller and a second motor stator positioned on an opposite
20 side of the impeller. The motor stators each include electrically conductive coils and pole pieces located within the housing. A detector senses the axial position of

the impeller. If the axial position is neutral, then current to the stators is not varied. However, if the axial position is other than neutral the relative currents to the first and second stators are varied to provide an axial force to return the impeller to neutral.

5 A more detailed explanation of the invention is provided in the following description and claims, and is illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a longitudinal, cross-sectional view of a pump
10 constructed in accordance with the principles of the present invention;

Figures 2-6 are diagrammatic views of various stator pole and rotor magnet positions, with arrows indicating the coil current direction;

Figures 7, 8 and 9 are diagrammatic side views of the motor stators and rotor magnets at different angular positions.

15 Figure 10 is a graph illustrating the relationship between the radial torque and axial force versus the rotor angle.

Figure 11 is a schematic stator control circuit according to principles of the present invention.

Figure 12 is a schematic control circuit according to another
20 embodiment of the present invention.

Figure 13 is a flow chart illustrating the detection system for the impeller position.

5

**DETAILED DESCRIPTION OF THE
ILLUSTRATIVE EMBODIMENT**

The present invention preferably utilizes two stators, each on opposite sides of the impeller and each having a number of stator coils and pole pieces. One example of an implantable heart pump with two stators is the Figures 10 11-14 embodiment of Wampler Application Serial No. 08/910,375, filed August 13, 1997, now U.S. Patent No. _____, the disclosure of which is incorporated herein. It is understood, however, that no limitation is intended with respect to the particular heart pump to which the present system is applicable.

As illustrated in Figure 1, a rotary blood pump 10 includes housing 12, having an elongated inlet tube 13 with an entry end 13' and an impeller casing or volute 14. A discharge tube 16 extends through the housing to communicate with the interior periphery of casing 14. Tube 16 has a tangential orientation with respect to the radius of the casing 14, for effectively channeling the blood output from the pump.

20 A pump rotor 17 is located within housing 12 and includes a support shaft 18 attached to an impeller 20. There is a blood flow path 21 between a rotor 17 and the inner sidewalls 23 of inlet tube 13.

Rotor 17 is mounted for rotation about a longitudinal axis which extends both through shaft 18 and impeller 20. Although this embodiment includes an impeller and a casing of centrifugal design, the present invention may also be adapted advantageously to rotary blood pumps of axial flow design or other types of rotary blood pumps.

Impeller 20 has a number of blade sectors that are relatively thick in the axial direction. The thick impeller 20 has the ability to utilize magnetic pieces 51 and 53 that are inserted in a manner enabling a pair of stators 24 and 26 to be on opposite sides of the impeller. A first motor stator 24, comprising conductive coils or motor windings 41a, 44a, pole pieces 44, 41 and back iron 31, is located at the rear of impeller 20 on a wall 24a. A second motor stator 26, comprising windings 41c, 44c, pole pieces 41d, 44d, and back iron 34, is positioned on the forward side of impeller 20 on a wall 26a. Although (for simplicity) only two coils and two pole pieces are illustrated on each side of the impeller in Figure 1, it is to be understood that in the embodiment illustrated in Figs. 2-9, six windings and pole pieces are on each side of the impeller.

Magnetic bearings 35 are provided on the rotor 17 and magnetic bearings 36 are on the casing 14 for levitating rotor 17 and maintaining it in proper radial alignment with respect to its longitudinal axis.

A hall sensor 38 comprising a magnet 40 along the axis of the impeller 20 and carried by the impeller 20 and a coaxial sensing element 40a

between the impeller and the housing 20 is provided for detecting and measuring axial movement of the impeller. The hall sensor 38 provides a real time measurement of the axial position of the rotor 17 relative to the stators 24, 26 and is part of a stator control circuit for varying the current to the motor coils 41a, 44a, 41c, 44c, in response to measured changes in position of the impeller 20, in order to apply an axial restoring force to the rotor 17.

It is to be understood that various other devices may be utilized for measuring the axial position of the rotor 17 relative to the stators 24, 26. For example, the impeller 20 may carry a magnet along its axis at its distal end and the casing 14 may also have a force transducer responsive to the distance of the magnet for providing a signal reflective of that distance. Various position sensors may be utilized as desired.

As discussed in more detail below, when the stators function to transmit torque, the stator windings 41a, 44a, 41c, 44c are energized to produce equal opposing axial forces on the magnets 51, 53. For example, windings 44a and 44c are producing electromagnets which are repelling the adjacent magnet face, i.e., north to north and south to south. Similarly, windings 41a and 41c are producing electromagnets which are attracting the adjacent magnet faces, i.e., north to south and south to north. These represent the two conditions in which the coils on each side of the magnet can act synergistically to produce torque.

During normal operation, the net axial force of the stator coils acting on the magnets is zero, provided that the magnets are axially centered between the stators. An imbalance in the current delivered to the coils will result in an imbalance in the electromagnetic forces produced by the stator coils and, an
5 imbalance in the axial force on the rotor. Torque will not be affected. As discussed below, this imbalanced force is exploited as a restoring force. Thus axial restoring forces are applied to the rotor by controlling the balance of the current in the opposed stator coils. To this end, the stators are controlled in parallel so that the current applied to the coils is adjusted to produce the necessary restoring
10 force on the rotor. The control of the restoring force is determined by the position of the rotor assembly as measured by the hall sensor or other type of position sensor.

The phasing of the restoring force, with respect to the torque angle of the motor, may be accomplished in several ways. One way would be to alter
15 only the current balance between the two coils but to keep the phasing of the current the same.

Another approach would be to apply a current pulse out of phase with the torque-producing current. In doing this, the restoring current pulse would act when it had the greatest affect on the axial position and the least contribution
20 to torque. This strategy preferably utilizes individual control of each coil in order to achieve the desired effect.

In an illustrative embodiment of the invention, the motor has six poles 41, 42, 43, 44, 45 and 46 in the stator and four poles (magnets) 51, 52, 53 and 54 in the rotor, although other combinations of motor poles and stator configurations may be utilized. Figures 2-6 comprise diagrammatic representations of four arc-shaped segments which represent the motor rotor and six arc-shaped segments which represent stator coils or windings. The six coils 41a, 42a, 43a, 44a, 45a and 46a are wired in three phases in a wye configuration or a delta configuration, such that, at any moment, two phases (four coils) are energized and the remaining phase (two coils) are not energized.

In Figures 2-6, coils 43a and 46a are phase A coils, coils 42a and 45a are phase B coils, and coils 41a and 44a are phase C coils. Although Figures 2-6 represent only a single stator motor, the principle for the double stator is the same. The stator is illustrated to visualize the resulting electromagnetization produced by the current in the energized coil. Phase A is magnetized to south and phase C to north. Thus there are two north and two south poles. The south poles are 180° apart and the north poles are 180° apart.

Phase B is not energized and has no electromagnetic pole. This represents one commutation state of the stator. There are a total of six commutation state combinations for a three phase motor. The motor control logic rotates the "wave" of magnetization around the stator in synchrony with the magnets as they spin in order to maintain torque. The commutation is done with

back emf sensing. The rotor position is found from the back emf signal and the phases are automatically switched to keep positive torque enabling the motor to run continually. Twelve commutations represent a 360° rotation.

The system for producing an axial restoring force using the stator
5 windings is diagrammatically illustrated in Figures 2-6. Referring to Figure 2, in which the rotor and stator are at a zero degrees position, magnet 51 is being repelled in the clockwise direction by pole 41 and magnet 54 is being repelled in the counterclockwise direction by pole 46. Since the magnets are placed symmetrically about the active stator poles, the resulting torque produced in this
10 position is zero. The same situation exists for magnets 52 and 53 with respect to stator poles 43 and 44. This may be referred to as "unstable" equilibrium point.

In Figure 3, the rotor has been rotated clockwise 30° . Magnet 54 is now being repelled by pole 46 in the clockwise direction and stator pole 41 is repelling magnet 51 in the clockwise direction, producing clockwise torque. A
15 torque of equal magnitude and in the clockwise direction is also being produced by the action between stator pole 43 and magnet 52 and stator pole 44 and magnet 53. This is useful torque although it is not maximum torque.

Now referring to Figure 4 in which the rotor has been rotated clockwise to 45° . Magnet 54 is positioned exactly in the middle between stator
20 pole 46 and stator pole 41. Stator pole 46 is repelling magnet 54 clockwise and stator pole 41 is attracting magnet 54 clockwise. Thus, there is a synergistic action

producing clockwise torque. A torque of equal magnitude and in the clockwise direction is also being produced by the action between stator pole 43 and stator pole 44 and magnet 52. This corresponds to the point of maximum torque. Magnets 41 and 43 are directly over stator poles 52 and 55 (which do not have
5 excitation current at this time). It should be noted that these diagrams represent only one stator, and that there is a mirror image of this relationship on the other end of the magnets in which all of the magnetic poles are switched to produce synergistic torque.

In Figure 5, the rotor has been rotated clockwise to 60° . Magnet
10 51 is being attracted by stator pole 43 in the clockwise direction and magnet 52 is being repelled by stator pole 43 in the clockwise direction and attracted by stator pole 44 in the clockwise direction, thereby producing torque that is substantially equal to the torque that is produced at 30° .

Now referring to Figure 6 in which the rotor has been rotated
15 clockwise to 90° , magnet 53 is being attracted by stator pole 46 in the clockwise direction and magnet 54 is being attracted to stator pole 41 in the counter clockwise direction. The forces are equal and opposite and no torque is produced. The same situation applies for magnets 51 and 52 and stator poles 43 and 44, respectively. This refers to the "stable" equilibrium point.

20 Figure 7 is a side view of the motor unwrapped in the condition discussed above at zero degrees which produces no torque. In Figure 8, there is

a side view of the relationship which exists at 45° with maximum torque. Figure 9 is a side view of the rotor at 90° rotation showing the torque to be zero again. If the magnet is precisely in the axial center between the two stator halves, and the current going to both the stators is equal, regardless of the rotational position of the rotor magnets or the sequence of excitation of the stator poles, the combination of magnetic attractive and repulsive forces will cancel each other out in the direction of the z axis, and there will be no net axial force. However, the action between the magnets and stator iron and poles is unstable and non-restoring. Thus, if the motor magnets are displaced in the positive z direction 0.005 inch for example, a force in the positive z direction will result. If a restoring force is not imposed, the magnets would not stop until they reached the housing or the stator iron. We have discovered that a magnetic restoring force can be provided by unbalancing the currents to the two stators, in order to return the magnets to the magnetic center.

As an example, (although no limitation is intended and the numbers could be other selected amounts), normally 26 ampere turns (AT) would go to each stator for a total of 52 AT acting on the motor magnets. In the first case (at zero degrees in Figure 7) the magnets are being repelled by the stator poles in a restoring manner. This is, as the magnets are moved in the positive z direction they come closer to like poles of the upper stator and experience an increased force pushing them in the negative z direction. Likewise, the lower end of the magnets

is moving further from the like poles of the lower stator and, thus, the action between them, pushing in the positive z direction is reduced. The same restoring dynamic would occur if the rotor magnets were deflected in the negative z direction. Changing the current balance between the two stators can increase this
5 desirable restoring force. If the current in the upper stator is increased to 39 AT and the lower stator decreased to 13 AT, the restoring force will be increased. This is because the upper stator poles will repel with greater force in the negative z direction and the lower stator poles will repel with less force in the positive z direction. The torque produced will be the same since there will still be a total of
10 52 AT acting on the rotor.

In the case at 90 degrees in Figure 9, where there is mutual attraction between the magnets and stator poles, the resulting force is not restoring in the z direction. If the rotor is displaced in the positive z direction, a force in the positive z direction will result. To counteract this force, one could lower the
15 current going to the upper stator to 13 AT and increase the current in the lower stator to 39 AT. As a result of this change, there will be a decreased attraction in the positive z direction by the upper stator and an increase attraction in the negative z direction, which will act to bring the magnets back toward the neutral position. Note that the total ampere-turns to the stators are still 52 AT. Thus, the resulting
20 torque is the same.

The graph of Figure 10 illustrates the relationship between the torque angle and the resulting axial force when the current to the stators is 13 AT in one and 39 AT in the other. The rotor magnets are located exactly half way between the two motor stators in the z-axis. This graph shows that a net axial
5 force can be produced. The magnitude of the force is proportional to the difference in current supplied to the upper and lower stator and the rotor angular position. This provides a means of keeping the magnets in the center while still using normal excitation and by manipulating only the current distribution to the two stators.

10 An axial position sensor and algorithm and a controlling circuit is shown in the schematic of Figure 11. A controller 60, which may include a microprocessor, operates in response to axial displacement sensor 38 to control the current through amplifier 62 to stator windings 46a and 43a; to control the current through amplifier 63 to windings 41a and 44a; to control the current through
15 amplifier 64 to windings 42 and 45 of motor stator 24; and to control the currents through amplifiers 65, 66 and 67 to the respective windings of oppositely positioned motor stator 26. For the motor shown, there would be twelve zones in each revolution when a restoring force could be applied to the rotor magnets. The restoring force is a function of rotor angular position and at the peak torque point,
20 there is little if any available axial force produced by the current imbalance in the stators.

Going back to the analog motor it can be seen that if the rotor is placed at the 45-degree position, magnets one and three are directly over the unexcited poles two and five. This can also be seen in Figure 7. With individual stator pole control, energizing these poles (which are not usually energized at this
5 time for producing torque) could create an additional restoring force. In this case it can be seen that the upper pole would repel in the negative z direction and the lower pole would attract, synergistically, in the negative z direction. No net torque would be produced by this action. By increasing the current to each pole, the restoring force would be increased proportionately. A schematic of the control
10 scheme needed to produce a restoring force in this way is shown in Figure 12.

Referring to Figure 12, controller 60 controls currents through a number of amplifiers, with each phase of windings having a pair of amplifiers for individual stator pole control.

The power requirements should be very low using the Figure 11
15 strategy, in which the current balance between the two stators is adjusted. Since the current would still be generating torque, the increased power would be the result of the increased I^2R losses in the stator coils. As an example, if the impedance of the excited phases in each stator is three ohms and the current is .5 amperes, the coil losses would be $(.25 \times 3) + (.25 \times 3) = 1.5$ watts. If the
20 current balance is changed such that one coil has .25 amperes and the other has .75 (corresponding to 13 AT and 39 AT, respectively) then the power would be (.0625

X 3) (.5625 X 3) = 1.875 watts. The increased power would be .375 watts if it was necessary to unbalance the stator currents by the above ratio all of the time. It is unlikely that continuous excitation would be needed. This would not account for losses of the additional controller electronics needed to achieve the active
5 control.

In the Fig. 12 embodiment in which the normally inactive stator poles are individually energized, the power used would not contribute to torque and would all be additional power and losses to the system. Since only one phase is being excited and since the currents would be equal and produce synergistic forces
10 the power would be (.25 X 3) = .75 watts, if these poles were excited all the time. Again, it is unlikely that they would be energized all the time.

Thus, a system for actively controlling the axial position using the coils of the stator poles for the production of torque and axial restoring forces is disclosed.

15 A flow diagram illustrating one system for unbalancing the currents to provide a magnetic restoring force is set forth in Figure 13. Referring to Figure 13, it can be seen that z is measured. If z is equal, equal currents are maintained on stator 24 (S_1) and stator 26 (S_2). However, if z is not zero, then it is determined whether z is greater than zero. If z is greater than zero, then the current to stator
20 26 (S_2) is decreased and the current to stator 24 (S_1) is increased. If z is greater

than zero, then the current to stator 26 (S_2) is increased and the current to stator 24 (S_1) is decreased.

It is to be understood that various methods and systems may be utilized for unbalancing the currents to the two stators for providing the magnetic
5 restoring force and that Figure 13 is only one of numerous methods that can be utilized.

Although illustrative embodiments of the invention have been shown and described, it is to be understood that various modifications and substitutions may be made by those skilled in the art without departing from the novel spirit and
10 scope of the present invention.

What Is Claimed Is:

1. A rotary blood pump, comprising:
 - a pump housing;
 - 5 a rotor mounted for rotation within said housing, said rotor having a shaft portion and an impeller carried by said shaft portion;
 - a rotor motor, said motor including a plurality of permanent magnets carried by said impeller and a motor stator including electrically conductive coils and pole pieces located within said housing;
 - 10 said motor being operable to transmit torque and also to provide an axial magnetic force that acts as an axial bearing.
2. A rotary blood pump as defined in claim 1, including radial magnet bearings carried by said shaft portion and radial magnetic bearings carried
15 by said housing.
3. A rotary blood pump as defined in claim 1, including a sensor for detecting axial deflection of said impeller and a circuit for energizing said stator in response to said detector.

20

4. A rotary blood pump, comprising:

a pump housing;

a rotor mounted for rotation within said housing, said rotor having a shaft portion and an impeller carried by said shaft portion;

5 a rotor motor, said motor including a plurality of permanent magnets carried by said impeller, a first motor stator positioned on one side of said impeller and a second motor stator positioned on an opposite side of said impeller;

said motor stators each including electrically conductive coils and pole pieces located within said housing;

10 said motor being operable to transmit torque and also to provide an axial magnetic force that acts as an axial bearing.

5. A rotary blood pump as defined in claim 4, including radial magnetic bearings carried by said shaft portion and radial magnetic bearings
15 carried by said housing.

6. A rotary blood pump as defined in claim 4, including a detector for detecting axial movement of said impeller and a circuit for providing energization to said stators in response to said detector.

20

7. A rotary blood pump as defined in claim 6, in which said detector senses the axial position of said impeller, if said axial position is neutral then current to said stators is not varied, but if said axial position is other than neutral the relative currents to said first and second stators are varied to provide
5 an axial force to return said impeller to neutral.

8. A rotary blood pump, comprising:
a pump housing;
a rotor mounted for rotation within said housing, said rotor having a
10 shaft portion and an impeller carried by said shaft portion;
a plurality of permanent magnets carried by said impeller;
a first motor stator on one side of said impeller for coaction with said permanent magnets carried by said impeller;
a second motor stator located on the opposite side of said impeller for
15 coaction with said permanent magnets carried by said impeller;
said first motor stator comprising a first plurality of coils and pole pieces;
said second stator comprising a second plurality of coils and pole pieces;
a circuit for energizing said first and second stators;
a detector for detecting a position of said impeller;
20 the energization of said stators being responsive to said detector for varying the position of said impeller in response to an output from said detector.

9. A method for controlling a rotary blood pump, which comprises the steps of:

providing a pump housing;

providing a rotor mounted for rotation within said housing, said rotor

5 having a shaft portion and an impeller carried by said shaft portion;

providing a rotor motor which includes a plurality of permanent magnets carried by said impeller and a motor stator; and

operating said motor to transmit torque and also to provide an axial magnetic force that acts as an axial bearing.

10

10. A method as defined in claim 9, including the steps of detecting axial deflection of said impeller and energizing said stator in response to said detection.

15

11. A method as defined in claim 9, including the steps of providing another motor stator on an opposite side of said impeller and controlling the current to said stators in response to axial movement of said impeller.

20 the steps of:

providing a pump housing;

providing a rotor mounted for rotation within said housing, said rotor having a shaft portion and an impeller carried by said shaft portion;

providing a rotor motor, said motor including a plurality of permanent magnets carried by said impeller, a first motor stator positioned on one side of said
5 impeller and a second motor stator positioned on an opposite side of said impeller;

operating said motor to transmit torque and also to provide an axial magnetic force that acts as an axial bearing;

detecting axial movement of said impeller; and

providing current to said stators in response to said detection step.

10

13. A method as defined in claim 12, in which the detection step comprises sensing the axial position of said impeller; if the axial position is neutral then not varying current to said stators, but if said axial position is other than neutral then varying the relative currents to said first and second stators to provide
15 an axial force to return said impeller to neutral.

14. A method of controlling a rotary blood pump, which comprises the steps of:

providing a pump housing;

20 providing a rotor for rotation within said housing, said rotor having a shaft portion and an impeller carried by said shaft portion;

providing a plurality of permanent magnets carried by said impeller;
providing a first motor stator on one side of said impeller for coaction
with said permanent magnets carried by said impeller;
providing a second motor stator located on the opposite side of said
5 impeller for coaction with said permanent magnets carried by said impeller;
energizing said first and second stators;
detecting the axial position of said impeller;
energizing said stators in response to said detection of said axial position
of said impeller to vary the position of said impeller.

10

15. A method for controlling a rotary blood pump, which comprises
the steps of:

providing a pump housing;
providing a rotor for rotation within said housing, said rotor having a
15 shaft portion and an impeller carried by said shaft portion;
providing a plurality of permanent magnets carried by said impeller;
providing a first motor stator on one side of said impeller for coaction
with said permanent magnets carried by said impeller;
providing a second motor stator located on the opposite side of said
20 impeller for coaction with said permanent magnets carried by said impeller;
detecting the axial position of said impeller; and

unbalancing the currents to the two stators in response to the detecting step for providing a magnetic restoring force to move the impeller axially.

FIG. 1

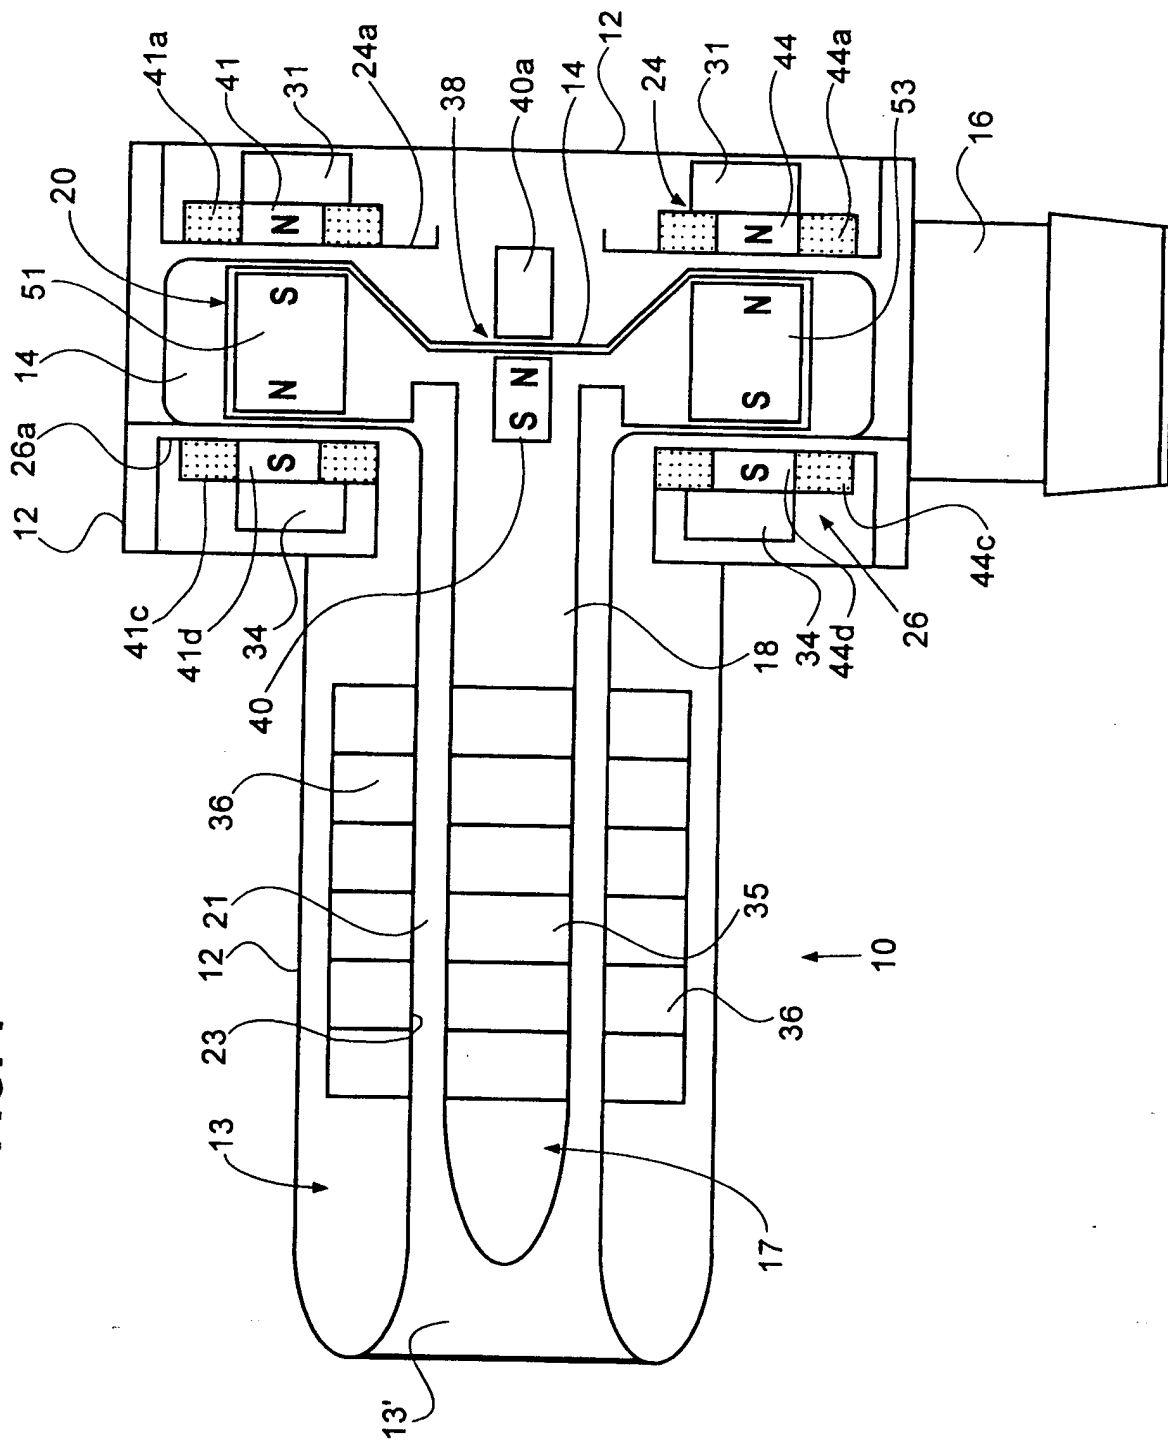


FIG. 2

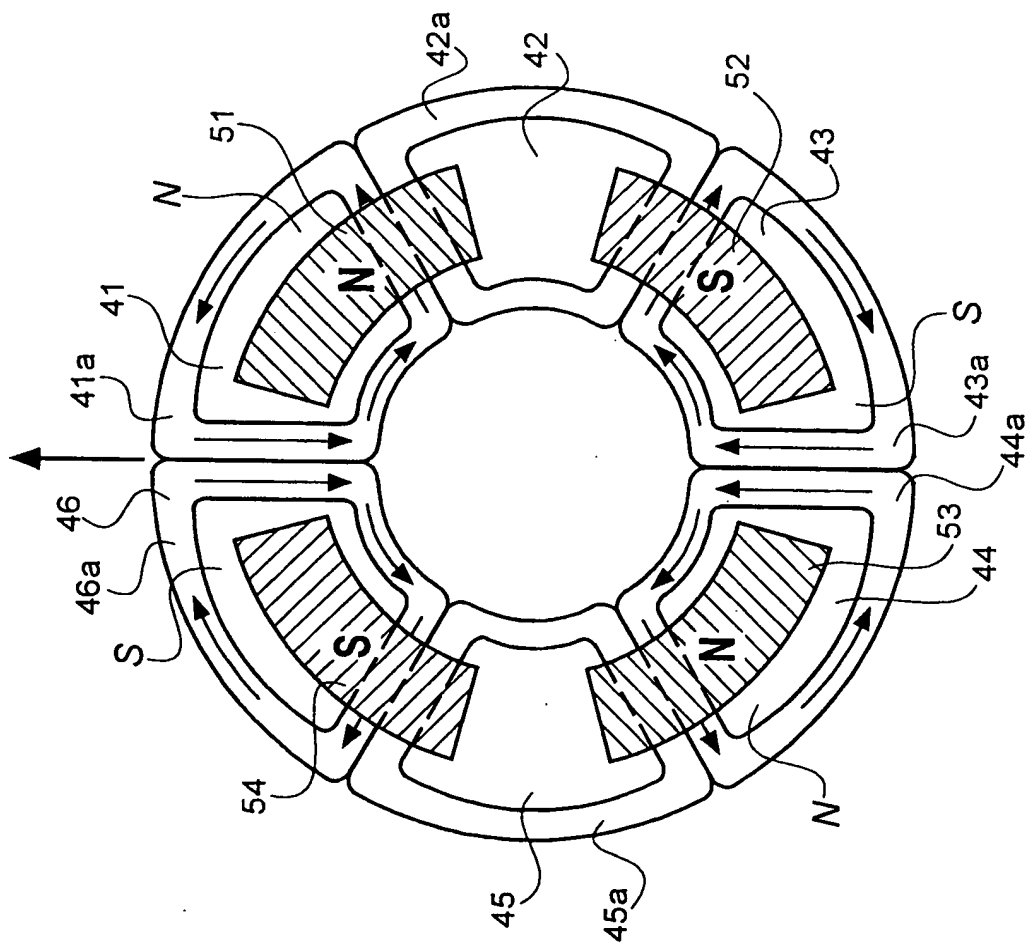


FIG. 3

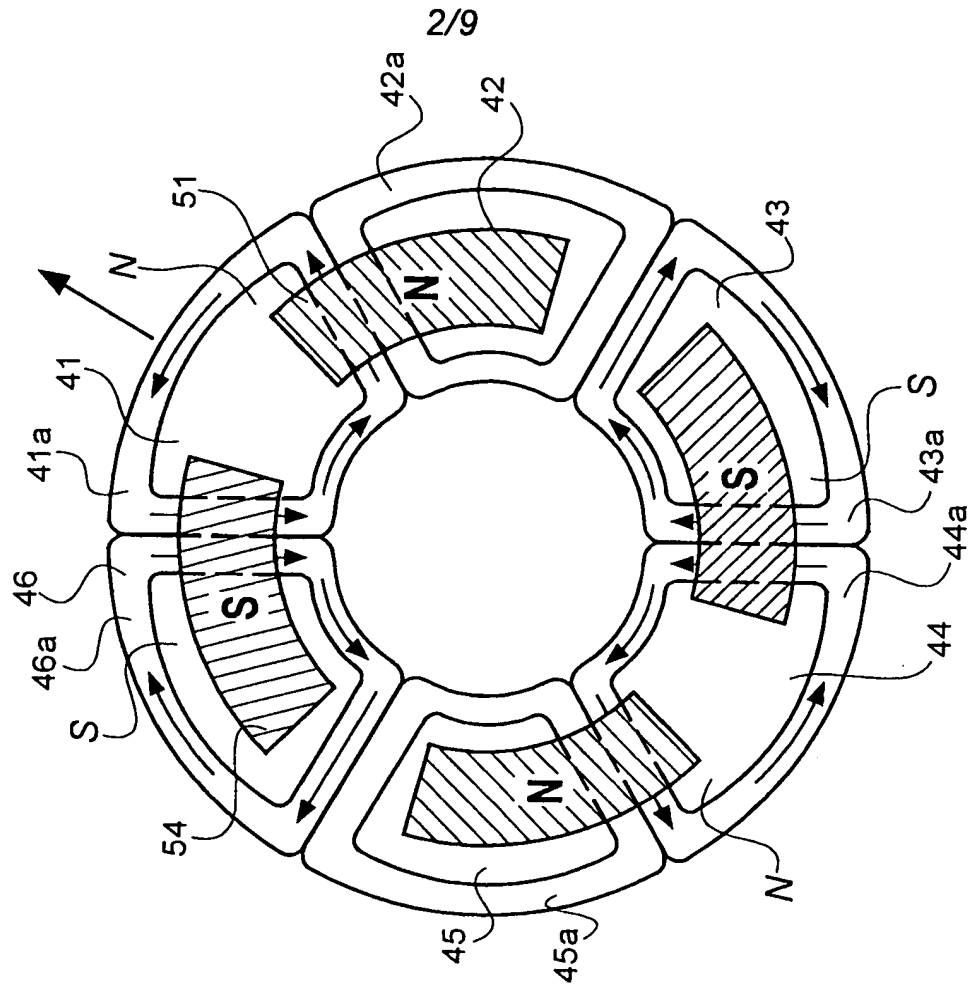


FIG. 5

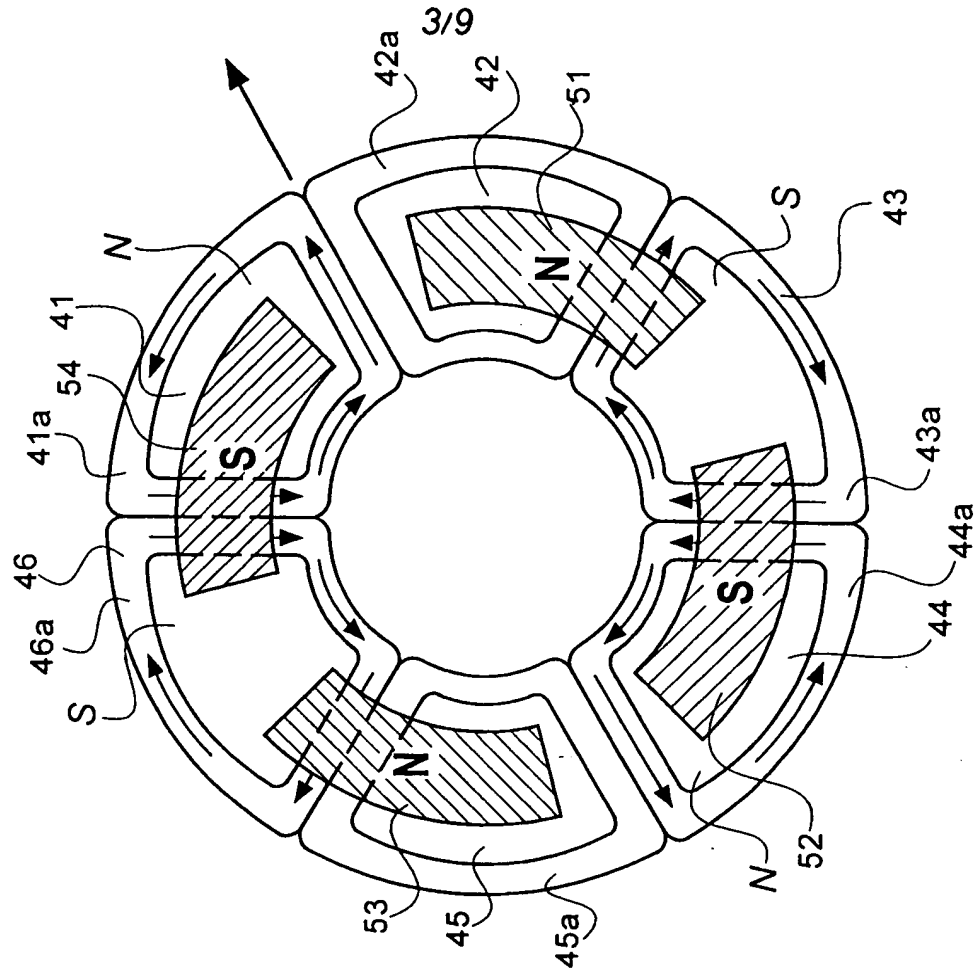


FIG. 4




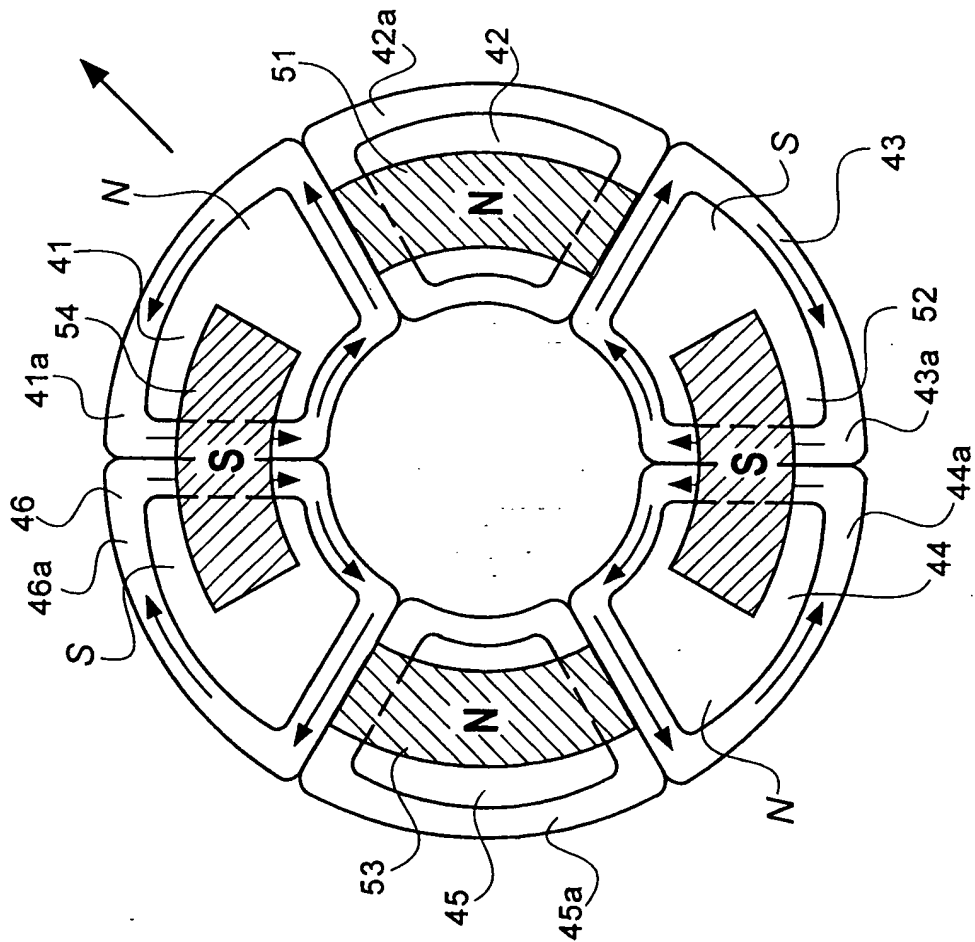


FIG. 6

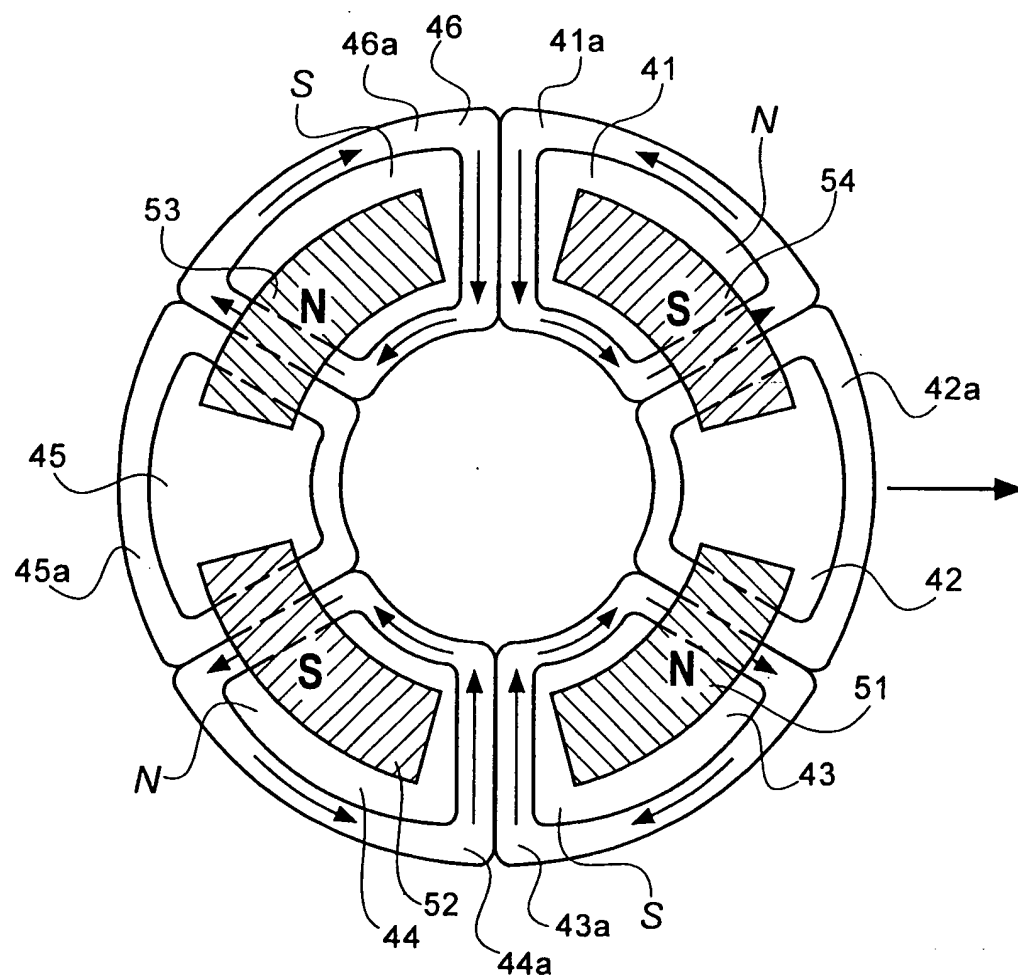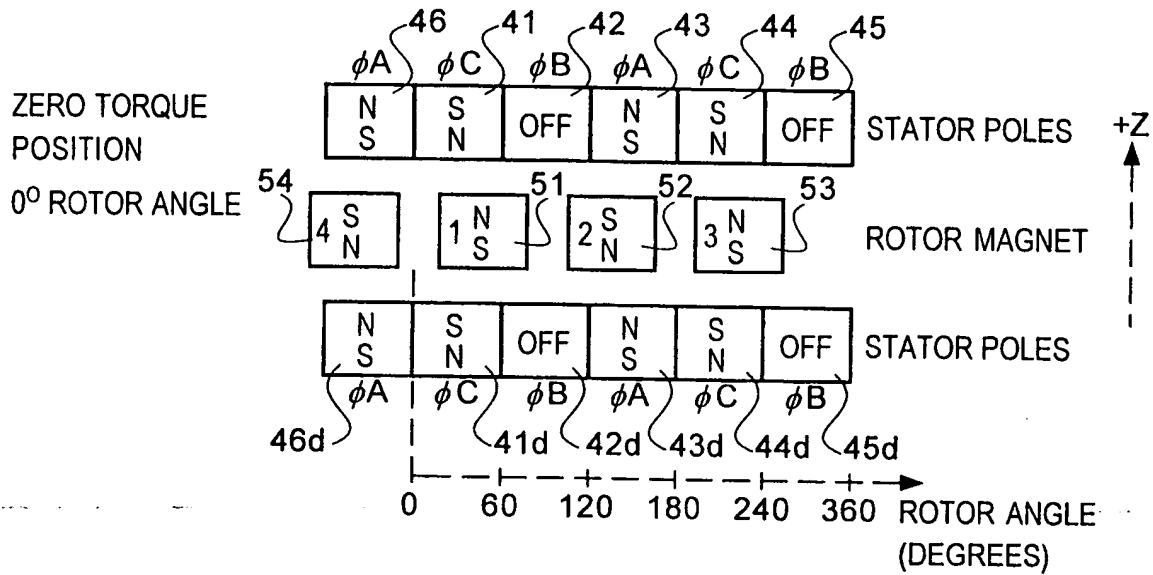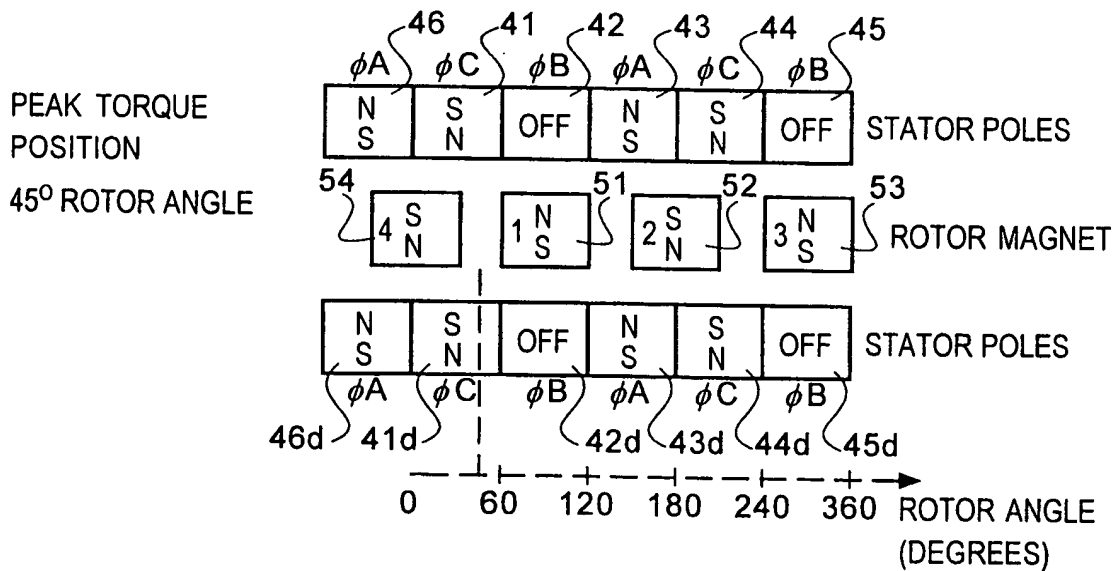

5/9

FIG. 7**FIG. 8**

6/9

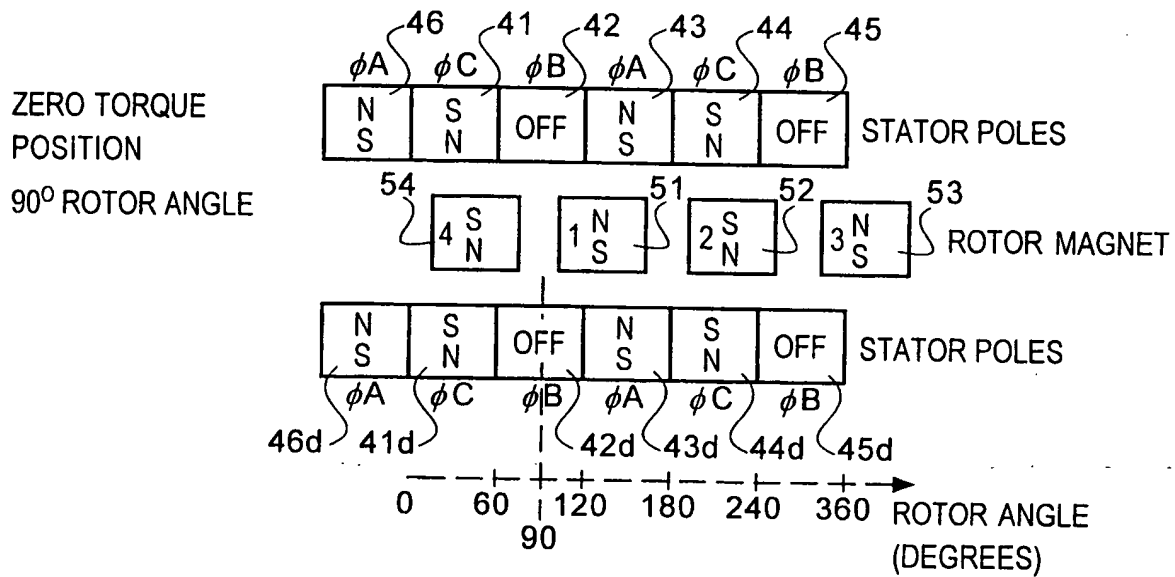
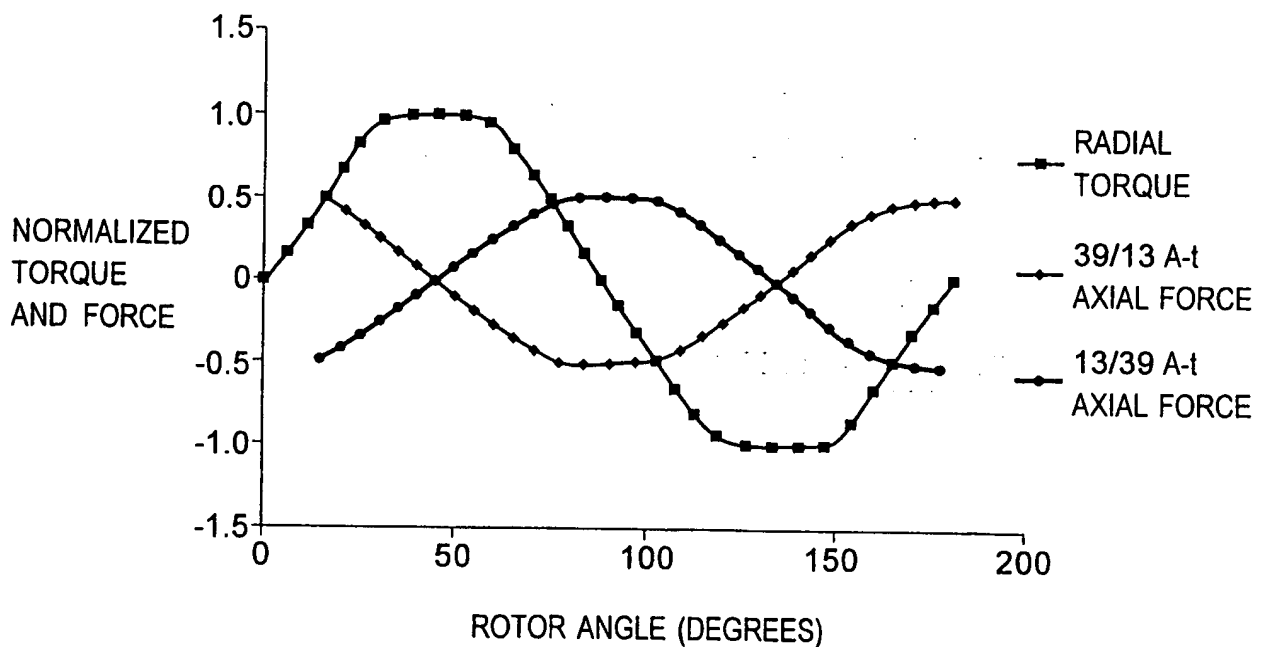
FIG. 9**FIG. 10**

FIG. 11



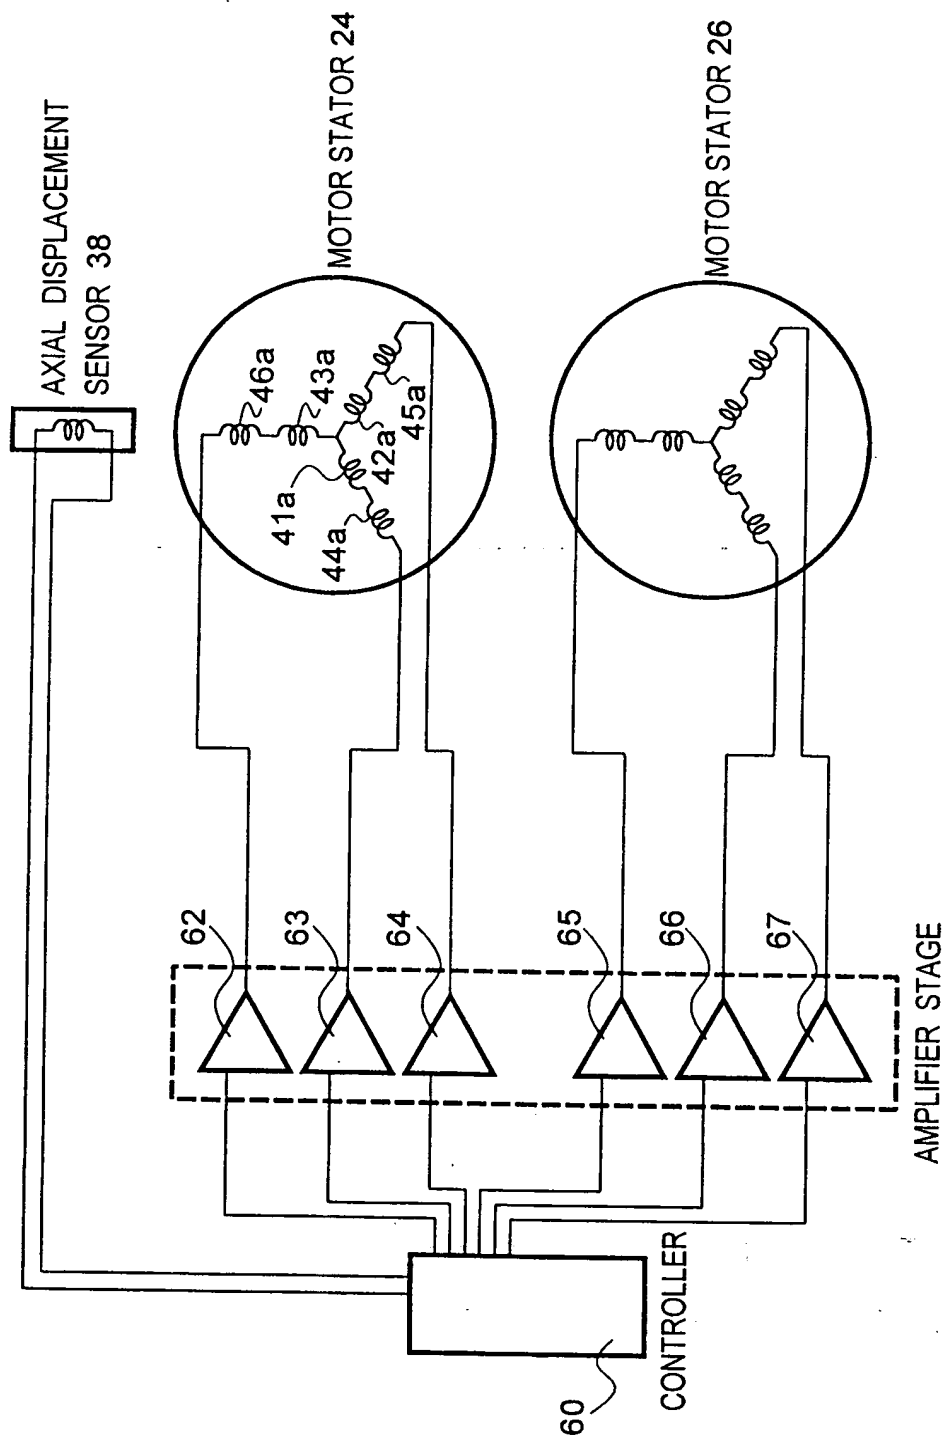


FIG. 12

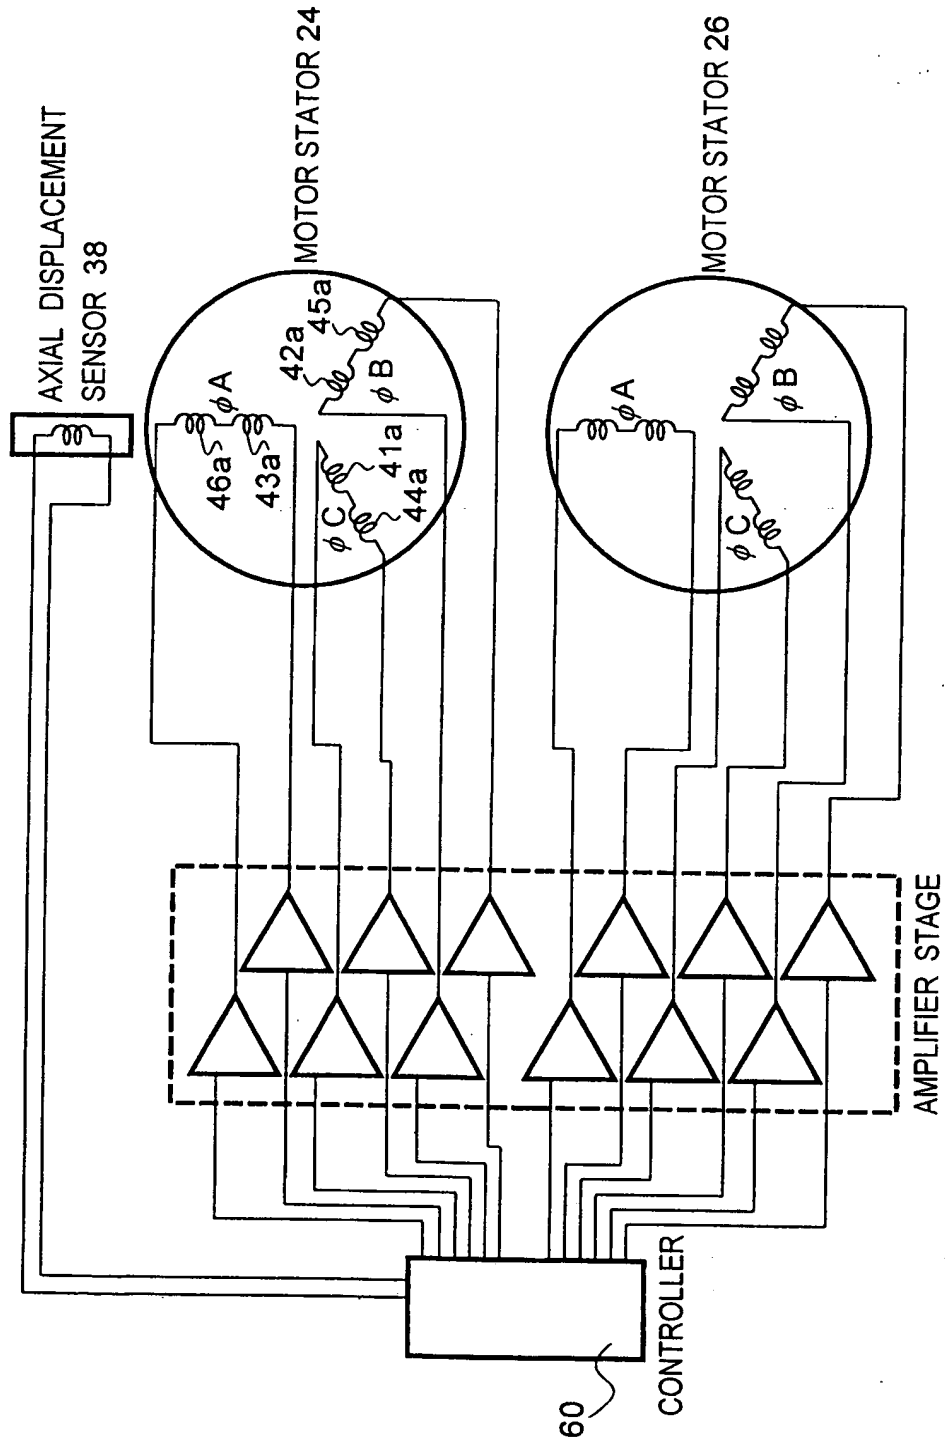

9/9

FIG. 13

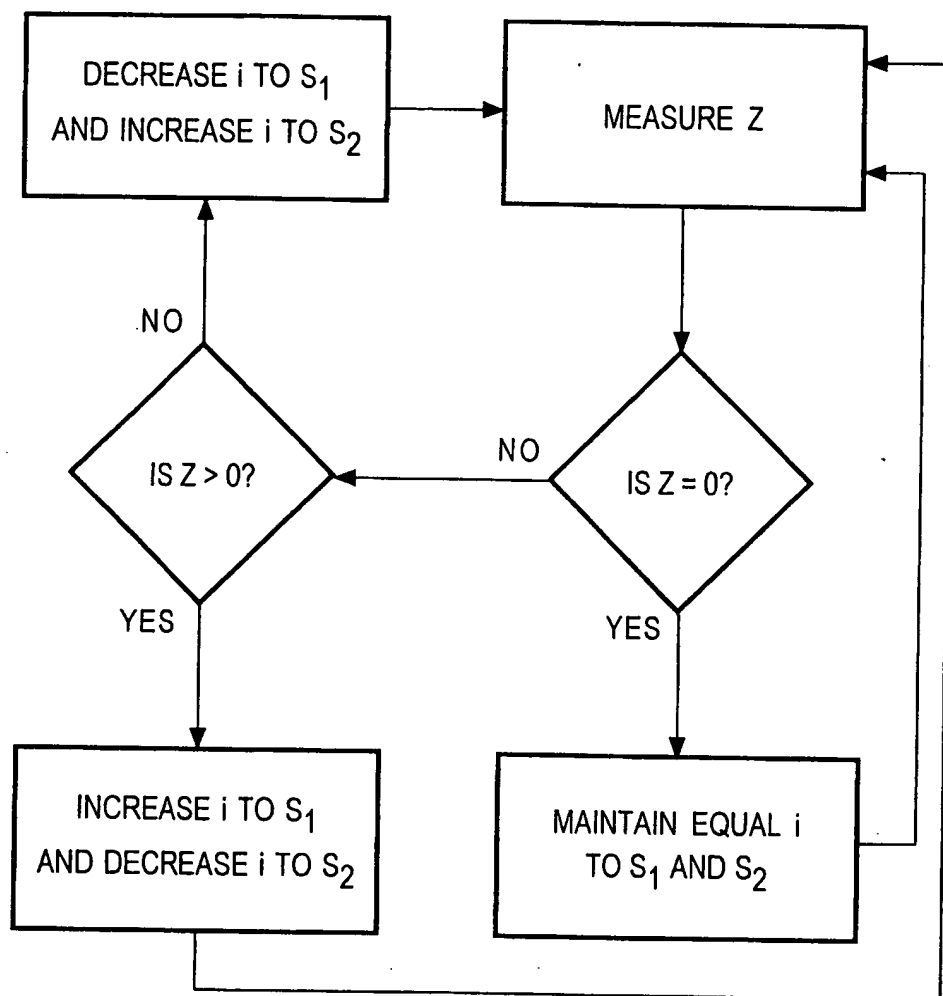

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/26839

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M1/10 H02K7/09 F04D29/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M H02K F04D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 88 07842 A (NIMBUS MEDICAL, INC.) 20 October 1988 (1988-10-20) the whole document	1-3
Y		6-8, 10-15
X	US 5 840 070 A (WAMPLER) 24 November 1998 (1998-11-24) cited in the application column 10, line 20 -column 11, line 12 figure 11	1,2,4,5, 9
Y		6-8, 10-15
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 March 2000

Date of mailing of the international search report

31/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Schönleben, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/26839

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 049 134 A (GOLDING ET AL.) 17 September 1991 (1991-09-17) column 3, line 42 - line 55 column 4, line 47 - line 60 figures 3,6	1,9
X	WO 98 11650 A (SULZER ELECTRONICS AG) 19 March 1998 (1998-03-19) page 9, line 12 -page 11, line 10 page 16, line 15 - line 35 page 23, line 3 -page 24, line 13 figures 1,5A,8A	1,3
A	DE 41 02 707 A (NTN CORP.) 8 August 1991 (1991-08-08) column 3, line 66 -column 4, line 49 column 6, line 8 - line 37 figure 10	4,6-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/26839

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 8807842 A	20-10-1988	US 4779614 A	25-10-1988
		AU 1701888 A	04-11-1988
		CA 1323467 A	26-10-1993
US 5840070 A	24-11-1998	US 5695471 A	09-12-1997
		AU 7993698 A	25-02-1999
		EP 0901797 A	17-03-1999
		JP 11123239 A	11-05-1999
		AU 708476 B	05-08-1999
		AU 2277797 A	02-09-1997
		CA 2218342 A	21-08-1997
		EP 0821596 A	04-02-1998
		JP 11504549 T	27-04-1999
		WO 9729795 A	21-08-1997
US 5049134 A	17-09-1991	US 5370509 A	06-12-1994
		US 5324177 A	28-06-1994
WO 9811650 A	19-03-1998	CA 2237203 A	19-03-1998
		EP 0860046 A	26-08-1998
DE 4102707 A	08-08-1991	JP 2031322 C	19-03-1996
		JP 3229987 A	11-10-1991
		JP 7051955 B	05-06-1995
		JP 4148094 A	21-05-1992
		JP 4148095 A	21-05-1992
		US 5112202 A	12-05-1992
		DE 4123433 A	06-02-1992